
FRONTEQ

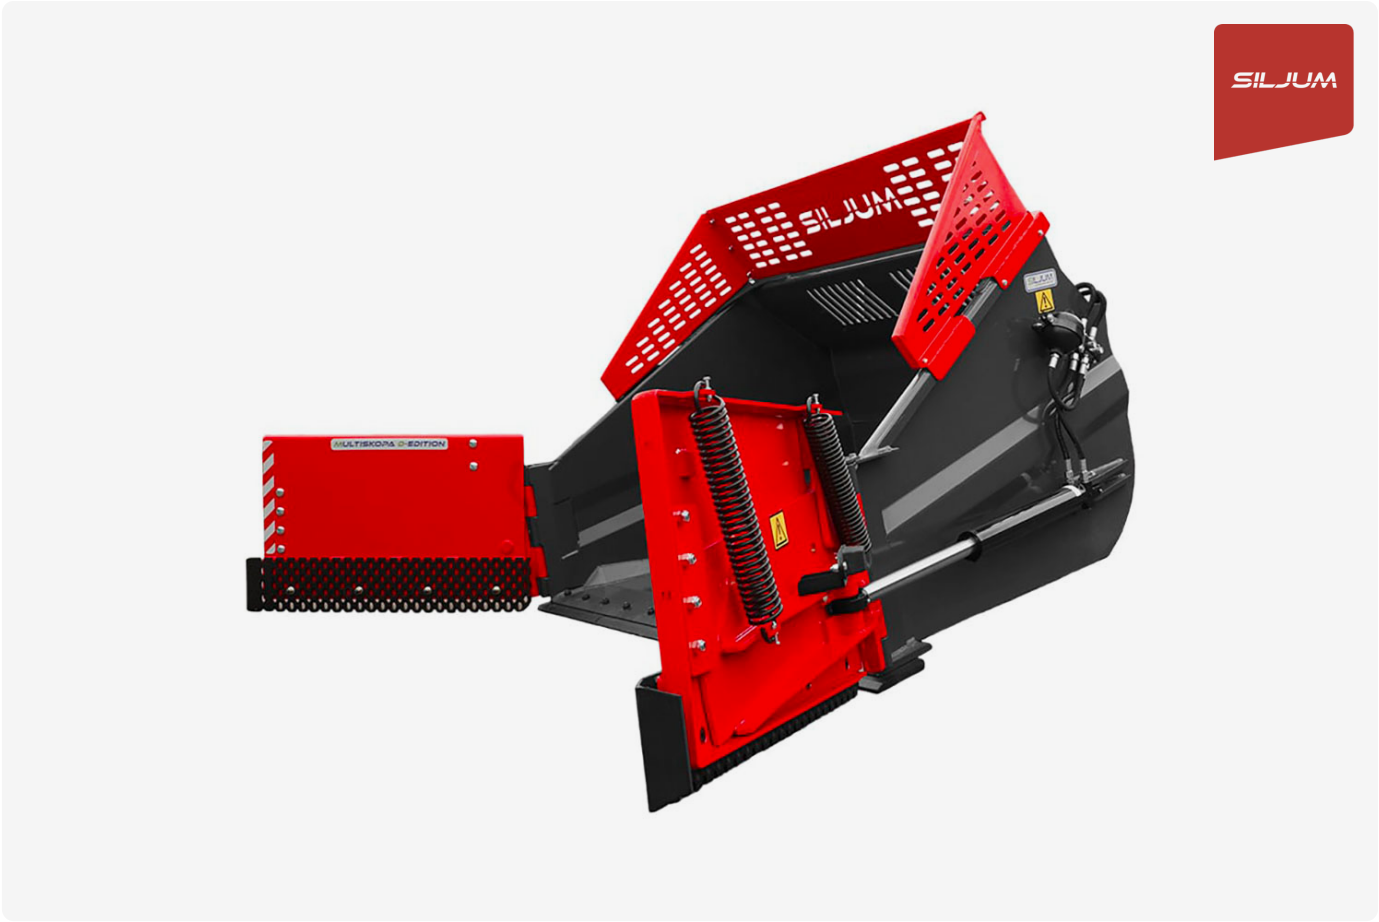

Siljum Multi Snow Bucket D-edition

Our Multi Snow Buckets are popular with drivers, contractors and clients alike, thanks to their flexibility with adjustable wings. With the multi-bucket, snow clearing becomes efficient and precise.

The Multi Snow Bucket D-edition has two individually controlled spring-loaded side wings that are easily adjusted from the driver's cab. To avoid damage in case of collision, the wings are equipped with a shock valve. In addition, the bucket and side wings are fitted with reversible wear edges.

The bucket is supplied as standard with flat bolt-on wear edges and the wings have P300 ice ripper cutting edges.


The Multi Snow Bucket D-edition is available in sizes from 2.2 to 9 cubic meters and is suitable for wheel loaders from 8 to 28 tons.

Product benefits



- Superior for clearing snow from streets, roads, car parks, courtyards, schools, sports grounds and industrial areas.
- Thanks to its flexibility, it is ideal for clearing snow in both narrow spaces and large areas.
- Leaves no strands of snow behind. Makes it possible to direct the snow exactly where it needs to go.
- The spring-loaded side wings are controlled hydraulically and individually from the drivers cab.
- The wings allow the driver to avoid obstacles without changing direction or losing speed.
- Each wing is spring-loaded and can be automatically raised and lowered, making it possible to have the wings on the pavement while keeping the bucket bolt-on edge facing the street.
- The bucket can be tilted up about 40 cm at the rear with the wings forward and still plough cleanly. This feature means that it is less sensitive to how the bucket is angled towards the ground.
- The spring-loaded wings distributes the wear and tear on the wear edges for unevenness.

Characteristics

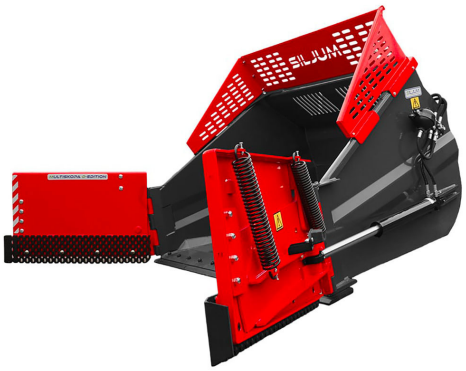

- Patented spring-loaded wings.
- Soft and responsive ride.
- End position damping cylinders.
- 2 accumulators + shock valves.
- Alternatively, 4 control hoses (4-hose).
- Base edge adapted for bucket cutting edge, or alternatively plough edge or ice ripper edge.

Wings:

- Patented spring-loaded wings in MC 650 material.
- Each wing is 1200 mm wide and 780 mm high.
- Vertical lifting height approx. 160 mm.
- The wings are rotatable up to about +-15 degrees.
- Can be supplemented with a throwing ear/throwing plate.

More features



- Equipped with a crossover valve that protects the bucket and wings when clearing snow both forwards and backwards.
- Accumulator with volume 1 litre and pressure 30 bar, is connected to each cylinder.
- Manoeuvring is done via 2 control hoses and an electric valve, or alternatively a connection block with 4 control hoses.
- Combined base edge designed for both bucket cutting edge and plough wear edge with 305 mm hole spacing. Asymmetrical bucket cutting edges are available to protect the hinge sleeves from wear.
- Supplied as standard with flat bolt-on edges on bucket and P300 ice ripper edges on wings.

Options

- Height extension frame kit. Effectively mounted with screws.
- P300 bolt-on edge on the bucket.
- P300 HD ice ripper edge on the bucket.
- Throwing ear/throwing plate on wings.

Teknisk data

Art. No.	Product name	Volume (m3)	Width min/max (mm)	Height (mm)	Wing (mm)	Weight, approx. (kg)	Recommended machine weight (tonnes)
22221212D	D-edition, electric valve	2,2	2630 / 4850	1270	1200	1200	8-10
22251212D	D-edition, electric valve	2,5	2830 / 5050	1270	1200	1250	9-15
22351212D	D-edition, electric valve	3,5	2930 / 5190	1270	1200	1300	9-17
22401212D	D-edition, electric valve	4,0	3380 / 5640	1270	1200	1450	12-18
22421212D	D-edition, electric valve	4,2	3000 / 5350	1280	1200	1400	12-18
22481212D	D-edition, electric valve	4,8	2980 / 5240	1540	1200	1550	14-22
22501212D	D-edition, electric valve	5,0	3350 / 5620	1540	1200	1700	14-22
22701215D	D-edition, electric valve	7,0	3350 / 6230	1700	1500	2000	14-22
22901215D	D-edition, electric valve	9,0	4030 / 6830	1860	1500	2400	22-28
22221312D	D-edition, 4-hose	2,2	2630 / 4850	1270	1200	1200	8-10
22251312D	D-edition, 4-hose	2,5	2830 / 5050	1270	1200	1250	9-15
22351312D	D-edition, 4-hose	3,5	2930 / 5190	1270	1200	1300	9-17
22401312D	D-edition, 4-hose	4,0	3380 / 5640	1270	1200	1450	12-18
22421312D	D-edition, 4-hose	4,2	3000 / 5350	1280	1200	1400	12-18
22481312D	D-edition, 4-hose	4,8	2980 / 5240	1540	1200	1550	14-22
22501312D	D-edition, 4-hose	5,0	3350 / 5620	1540	1200	1700	14-22
22701315D	D-edition, 4-hose	7,0	3350 / 6230	1700	1500	2000	14-22
22901315D	D-edition, 4-hose	9,0	4030 / 6830	1860	1500	2400	22-28

Denna PDF är genererad från https://fronteq.se/en. Vi reserverar oss för felskrivningar och faktafel i texter och tabeller. Vi förbehåller oss även rätten att justera modellutbud och specifikationer utan föregående information. Bilder kan visa produkter i alternativt eller extrautrustat utförande. För mer information och aktuella priser, kontakta info@fronteq.se.