
FRONTEQ

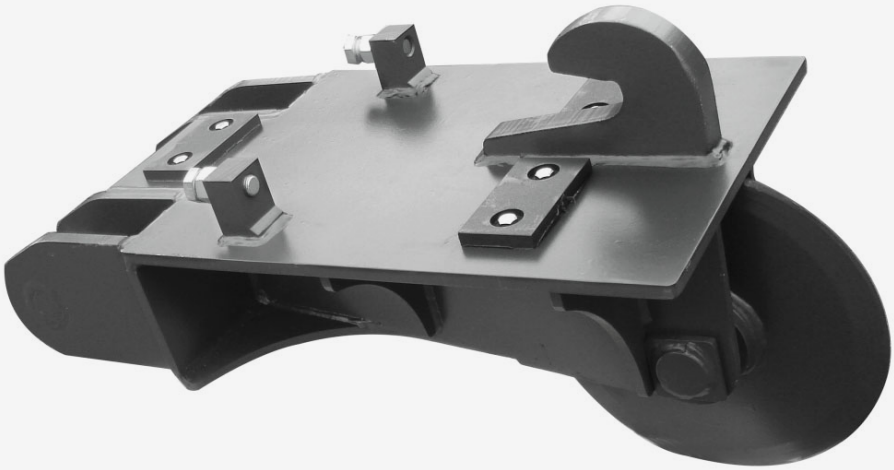

Götene Asphalt Cutter

One of the market's most powerful asphalt cutters from Götene with a cutting diameter of Ø400 or Ø500 mm.


Very easy to maintain thanks to its construction with few parts.

The cutting wheel is made of Hardox 450 material. The asphalt cutter has well-dimensioned axles and bushings. The axle to the cutting wheel is robust and through-hardened. The bearing consists of a replaceable bronze bushing.

Suitable for excavators between 12 and 29 tonnes.

Characteristics

- Asphalt cutter with excellent cutting characteristics and robust design.
- Cutting wheel in Hardox 450.
- Robust welded support profiles.
- Strong through-bearing shaft to the cutting wheel.
- Replaceable bronze bushing.
- Cutting wheel with a diameter of 400 or 500 mm.
- The bearing consists of a replaceable bronze bushing. Lubrication instructions are included with each product.

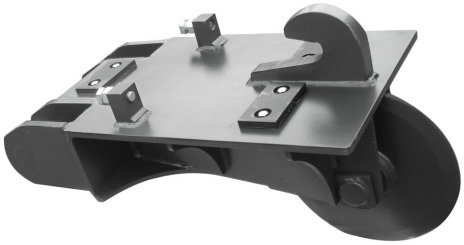

Other:

- *Shaft Ø 60 refers to the inner diameter of the bearing. The bearing consists of a replaceable bronze bushing.
- Other attachments are offered.
- The weight varies depending on the attachment.

Teknisk data

Item no.	Product name	Attachment	Weight, approx. (kg)	Shaft (mm)	Wheel (mm)	Recommended machine weight (tonnes)
60220S60	Asphalt cutter	S 60	140	Ø 60*	Ø 400	12-18
60221S60	Asphalt cutter	S 60	145	Ø 60*	Ø 500	12-18
60220B20	Asphalt cutter	B-20	155	Ø 60*	Ø 400	13-22
60221B20	Asphalt cutter	B-20	170	Ø 60*	Ø 500	13-22
60225B27	Asphalt cutter	B-27	210	Ø 60*	Ø 400	18-29
60225S70	Asphalt cutter	S-70	180	Ø 60*	Ø 400	17-25
60226B27	Asphalt cutter	B-27	225	Ø 60*	Ø 500	18-29
60226S70	Asphalt cutter	S-70	195	Ø 60*	Ø 500	17-25
60220	Cutting wheel 400 mm			Ø 60*	Ø 400	
60221	Cutting wheel 500 mm			Ø 60*	Ø 500	
60222	Shaft			Ø 60*		
BRM60/65-70	Bronze bushing, separate (included with purchase of cutting wheel).					

Denna PDF är genererad från https://fronteq.se/en. Vi reserverar oss för felskrivningar och faktafel i texter och tabeller. Vi förbehåller oss även rätten att justera modellutbud och specifikationer utan föregående information. Bilder kan visa produkter i alternativt eller extrautrustat utförande. För mer information och aktuella priser, kontakta info@fronteq.se.